

HIGH QUALITY DURABLE MATERIALS

Manufactured from UV Stabilised High Quality Glass Fibre Reinforced Nylon and Nitrile Rubber O-Ring giving a weather, termite, fungi and bacterial resistance




O-RING SEAL

For a leak proof connection.



PRECISION HEAVY DUTY TAPERED THREADS

Gives a Strong Reliable Seal. Material is strong enough to minimise potential cross threading.

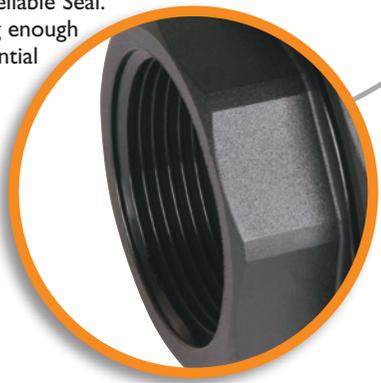

MAXIMUM WORKING PRESSURE

16 Bar (235 psi)
@ 20°C



STRONG COMPACT DESIGN


The compact design of the Hansen Quick Connect Barrel Union makes it especially suited to tight spaces where there is very little room for movement when connecting and disconnecting pump or pipe.



POTABLE WATER APPROVED

Materials approved for use with Potable (drinkable) Water

AS/NZS 4020

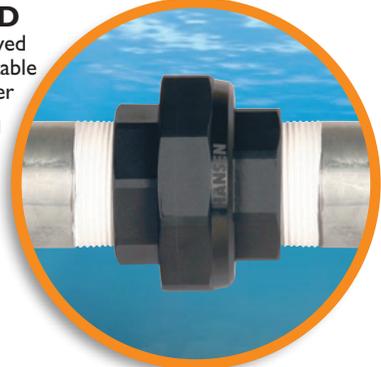

PUMP TO PIPE


EASY TO USE

As with all Hansen fittings, simplicity & ease of use remain at the core of the Hansen Quick Connect Barrel Union.

1. Disconnect current pipe from pump by unwinding the Common Centre Nut



2. Connect the new pipe to pump by winding the Common Centre Nut onto the matching male thread



PIPE TO PIPE

1. Disconnect current pipe by unwinding the Common Centre Nut



2. Connect new pipe to pipe by winding the Common Centre Nut onto the matching male thread



EASY SLIP DOWN ACTION

The easy slip down action makes uninstalling pumps & pipe work a breeze! When the common nut is wound off, the pipe simply 'slips down' with virtually no extra forward or backward movement required to separate the connection.



Available in Sizes:

15mm, 20mm, 25mm, 32mm, 40mm, 50mm, 25x20mm, 32x25mm (1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 1"x3/4", 1-1/4"x1")



Strong, Compact and Easy to Use Unions

www.hansenproducts.com